


ø30 Installation Mount LED beacon

300 Series



MS 383



FEATURES

- Ø30mm reasy installation
- Ø70mm LED beacon
- 50.000h LED lifetime
- 10 LED mods
- Built in Buzzer
- To change mods open lens by turning counter clockwise press white button while light is energized

DRAWINGS

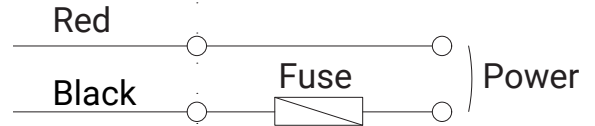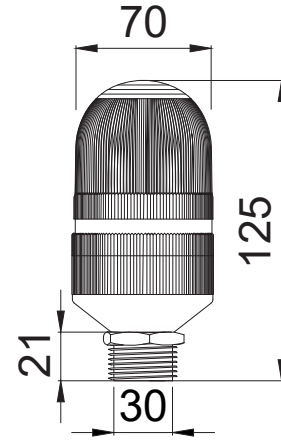

SPECIFICATION

Voltage range (V)	85-260VAC	12-60VAC/DC
Current range(MA)	40-20	300-60
Power range(W)	4.5	
LED Bin Code	6000-6500K	
Light Intensity(MCD)	132000	
Working Mode	3 flashing 6 flashing 10 flashing steady on 60FPM 90FPM 150FPM double flash slow rotation fast rotation random	
Sound Volume	100dB at source 90db at 1m	
Tone	1	
Materials	Lens PC, Body-ABS	
Protection Rate	IP65	

ORDER DATA

Color	Voltage	Order number
Red	85-260VAC	MS 383.1.85-260VAC
	12-60VAC/DC	MS 383.1.12-60VAC/DC
Green	85-260VAC	MS 383.2.85-260VAC
	12-60VAC/DC	MS 383.2.12-60VAC/DC
Amber	85-260VAC	MS 383.3.85-260VAC
	12-60VAC/DC	MS 383.3.12-60VAC/DC
White	85-260VAC	MS 383.4.85-260VAC
	12-60VAC/DC	MS 383.4.12-60VAC/DC
Blue	85-260VAC	MS 383.5.85-260VAC
	12-60VAC/DC	MS 383.5.12-60VAC/DC