


Motor Sirens

MS 880 No 5 Motor Siren




SPECIFICATION

Voltage range (V)	220VAC
Current range (mA)	3.25A
Power range (W)	800W
Sound Volume	138dB at 10cm 130dB at 1m
Tone	1
Materials	Aluminum Diecast
Protection Rate	IP44
Weight (KG)	3,6KG
Dimensions	160x400x420mm


FEATURES

- Clear and distinctive sound signals
- For industrial and general applications
- Protective cap
- Aluminum Diecast Body
- Base Screw Mounting(screws not included)



DRAWING

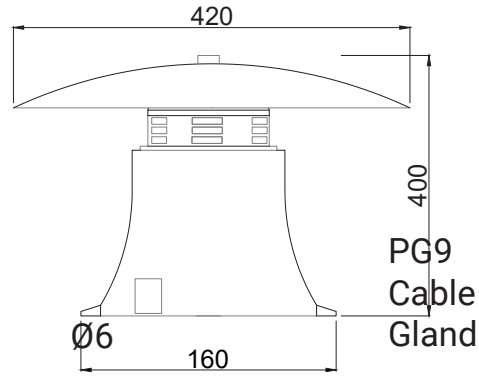

WIRING

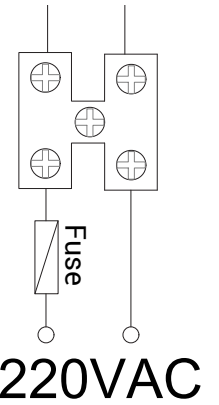

MOUNTING

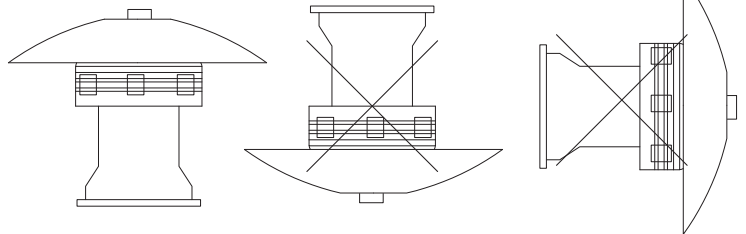

Ürüne elektrik verilmeden önce ürünün sıkı şekilde monte edildiğinden emin olunmalıdır. Kurulum teknik personel tarafından yapılmalıdır.

Before applying electricity to the product, it should be ensured that the product is firmly mounted. Installation must be done by technical personnel.

ORDER DATA

Voltage	Order number
220VAC	MS 880.220VAC

Un fabrikaları, taş, beton, marangoz atöylesi gibi partiküllü çalışma alanlarında mutlaka koruyucu ince tel kafes kullanılmalıdır.

Protective thin wire cages must be used in work areas containing particles such as flour factories, stone, concrete and carpentry workshops.